


AQUARIAN 250L GENERAL DEMARCATION

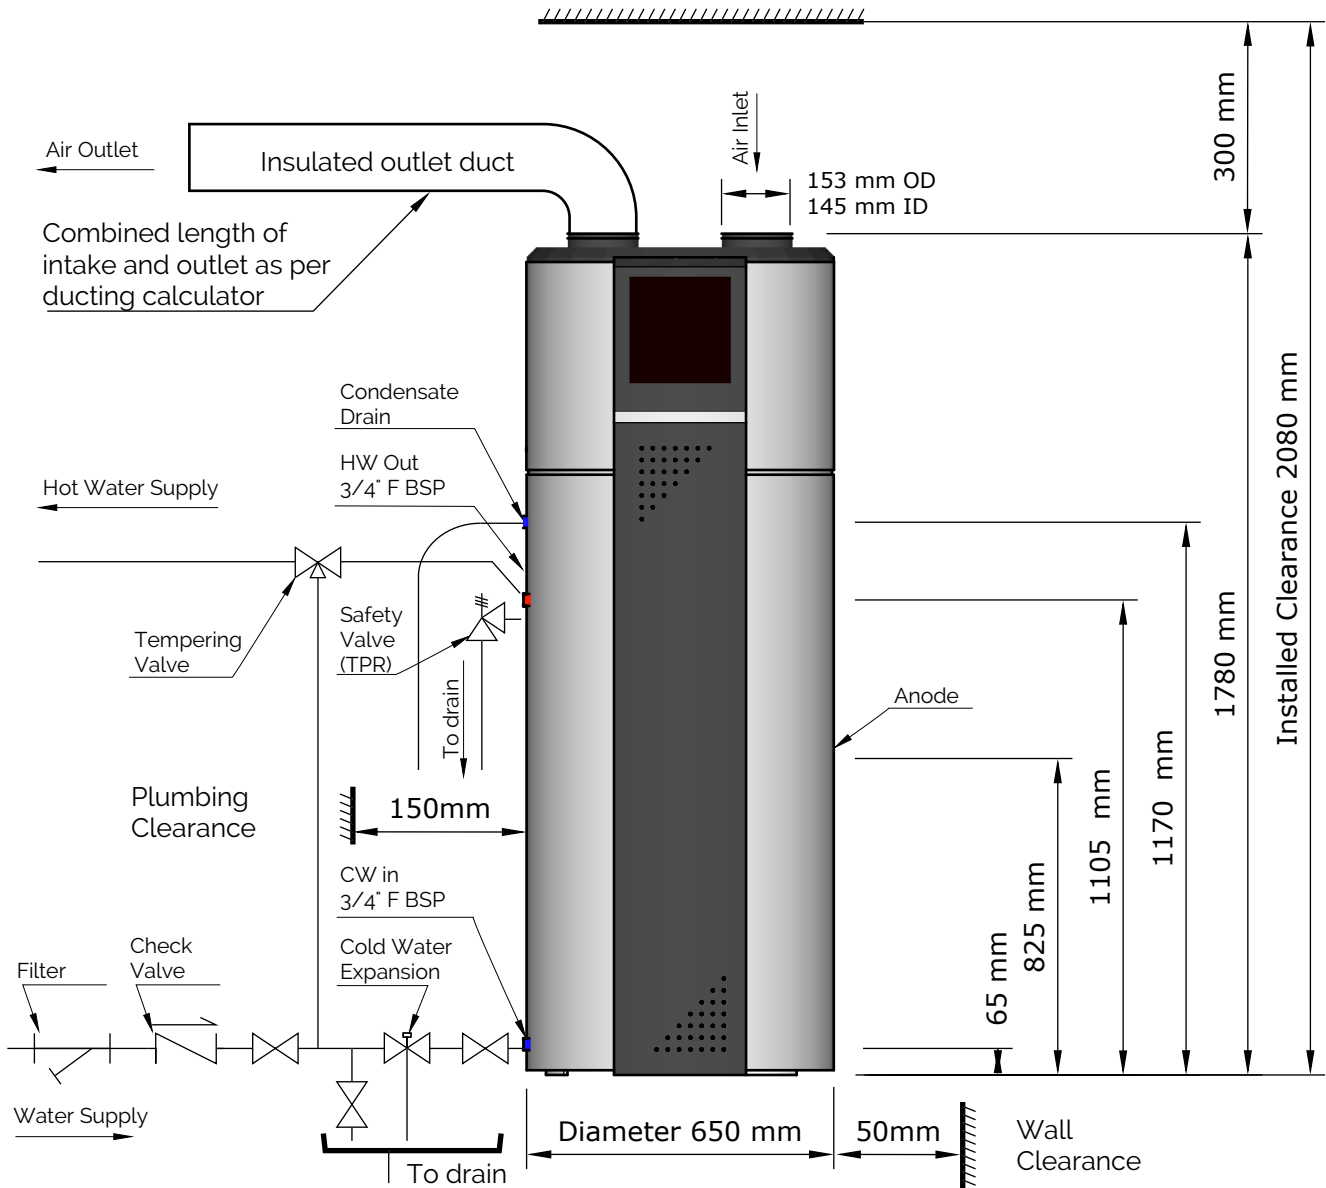

Application	Indoor / Sheltered Outdoor
Electrical Supply	Dedicated circuit, single phase power outlet rated for 10 Amps
Water supply pressure	Water supply pressure 100kPa - 650kPa or use pressure reducing valve for >650kPa. Relief pressure setting 700 kPa
Installation Area Required	Indoor space 850 wide X 700mm deep X 2020mm high Outdoor area directly sheltered from weather and with a firm base such as a concrete pad
Drainage	Pressure relief / system drain down in 20mm copper. Drainage condensate 15mm PVC or other
Weight	120kg Unflooded, 370kg Flooded
Ventilation	Combined length of intake and outlet as per ducting calculator. Duct diameter 150mm: Both exhaust and intake must be fitted with 150mm grills. Exhaust duct must be insulated with synthetic, non-absorbent insulation. Source of ducted air intake must exceed 28 m ³
Transport, Access and Installation	Heat pump must not be tilted more than 30° from vertical at any time or warranty will be void. Ensure unobstructed access from unit delivery point to installation area, including door widths and other potential obstructions.