


AQUARIAN 275LE GENERAL DEMARCATION

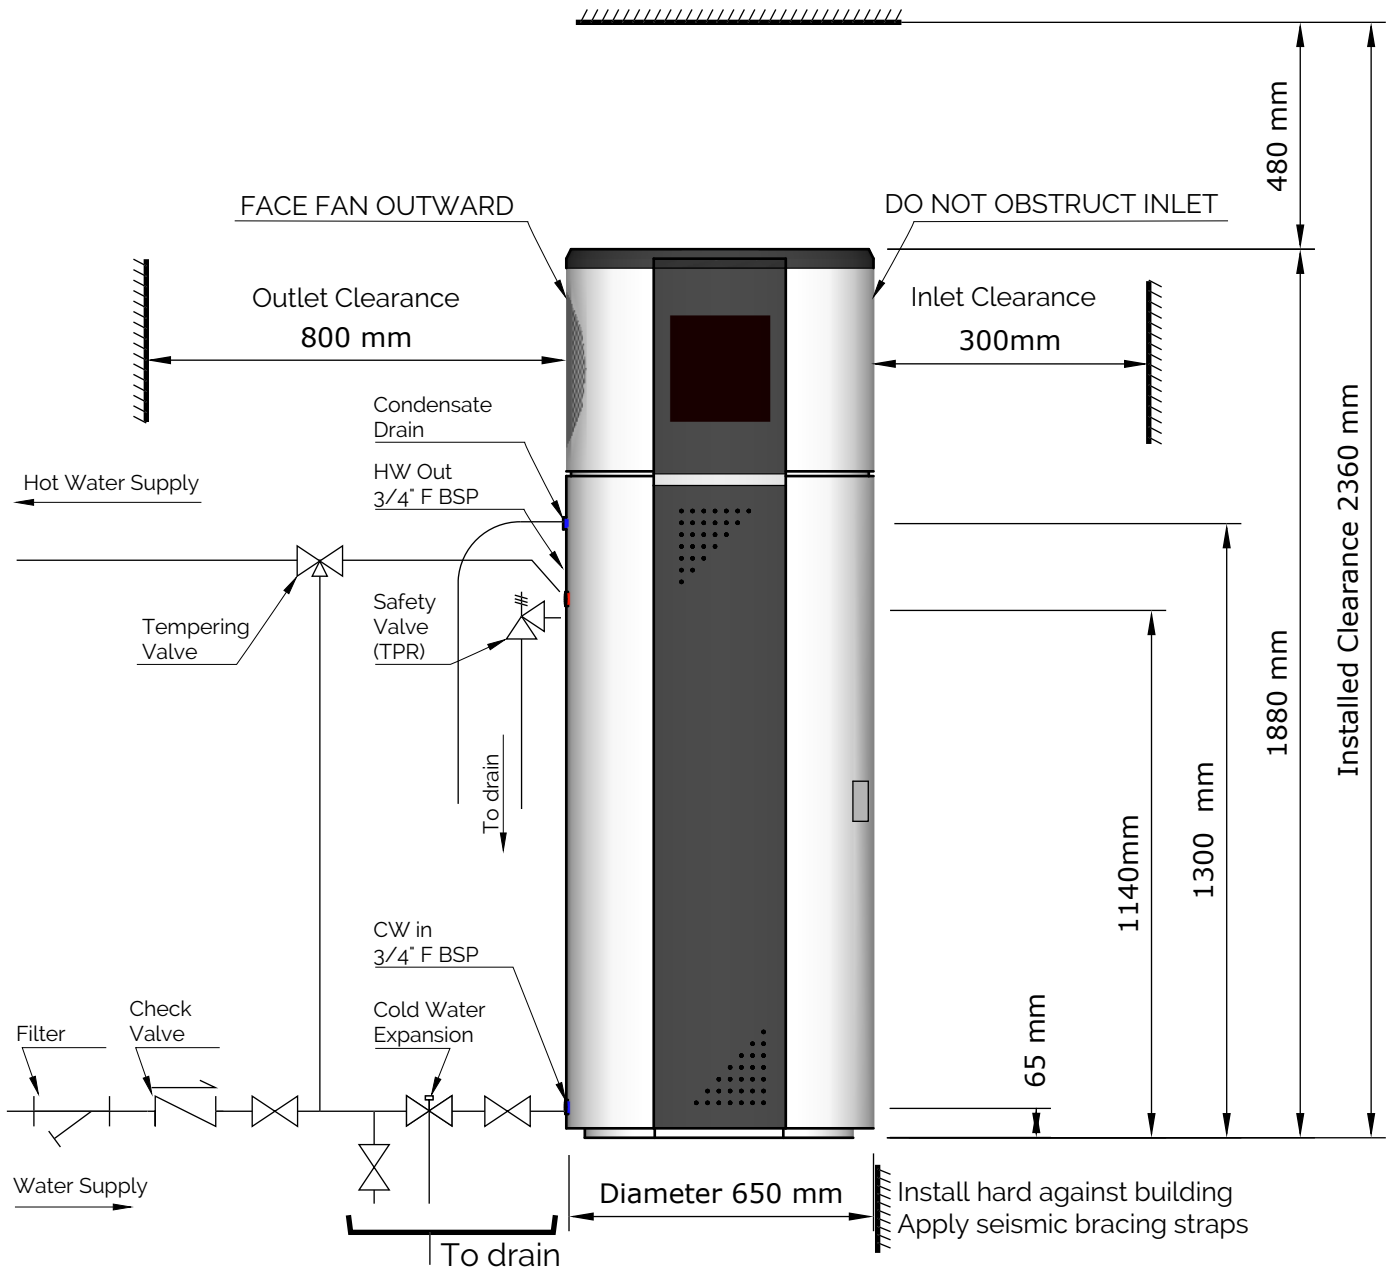

Application	Outdoor
Electrical Supply	Dedicated circuit, single phase power outlet rated for 10 Amps Cable must be protected from weather using PVC conduit
Water supply pressure	Water supply pressure 100kPa - 650kPa or use pressure reducing valve for >650kPa. Relief pressure setting 700 kPa
Installation Area Required	Level outdoor area with a firm base such as a concrete pad, capable of withstanding 500kg
Drainage	Pressure relief / system drain down in 20mm copper. Drainage condensate 15mm PVC or other
Weight	120kg Unflooded, 400kg Flooded
Ventilation	Clearance in front of exhaust grill of 800mm, exhaust fan must face outward Clearance in front the intake grill of 300mm, intake vents must not be restricted
Transport, Access and Installation	Heat pump must not be tilted more than 30° from vertical at any time or warranty will be void. Ensure unobstructed access from unit delivery point to installation area, including door widths and other potential obstructions.